


## Specification Check

- Before installation, please ensure that your bike frame and crankset meet the following specifications.

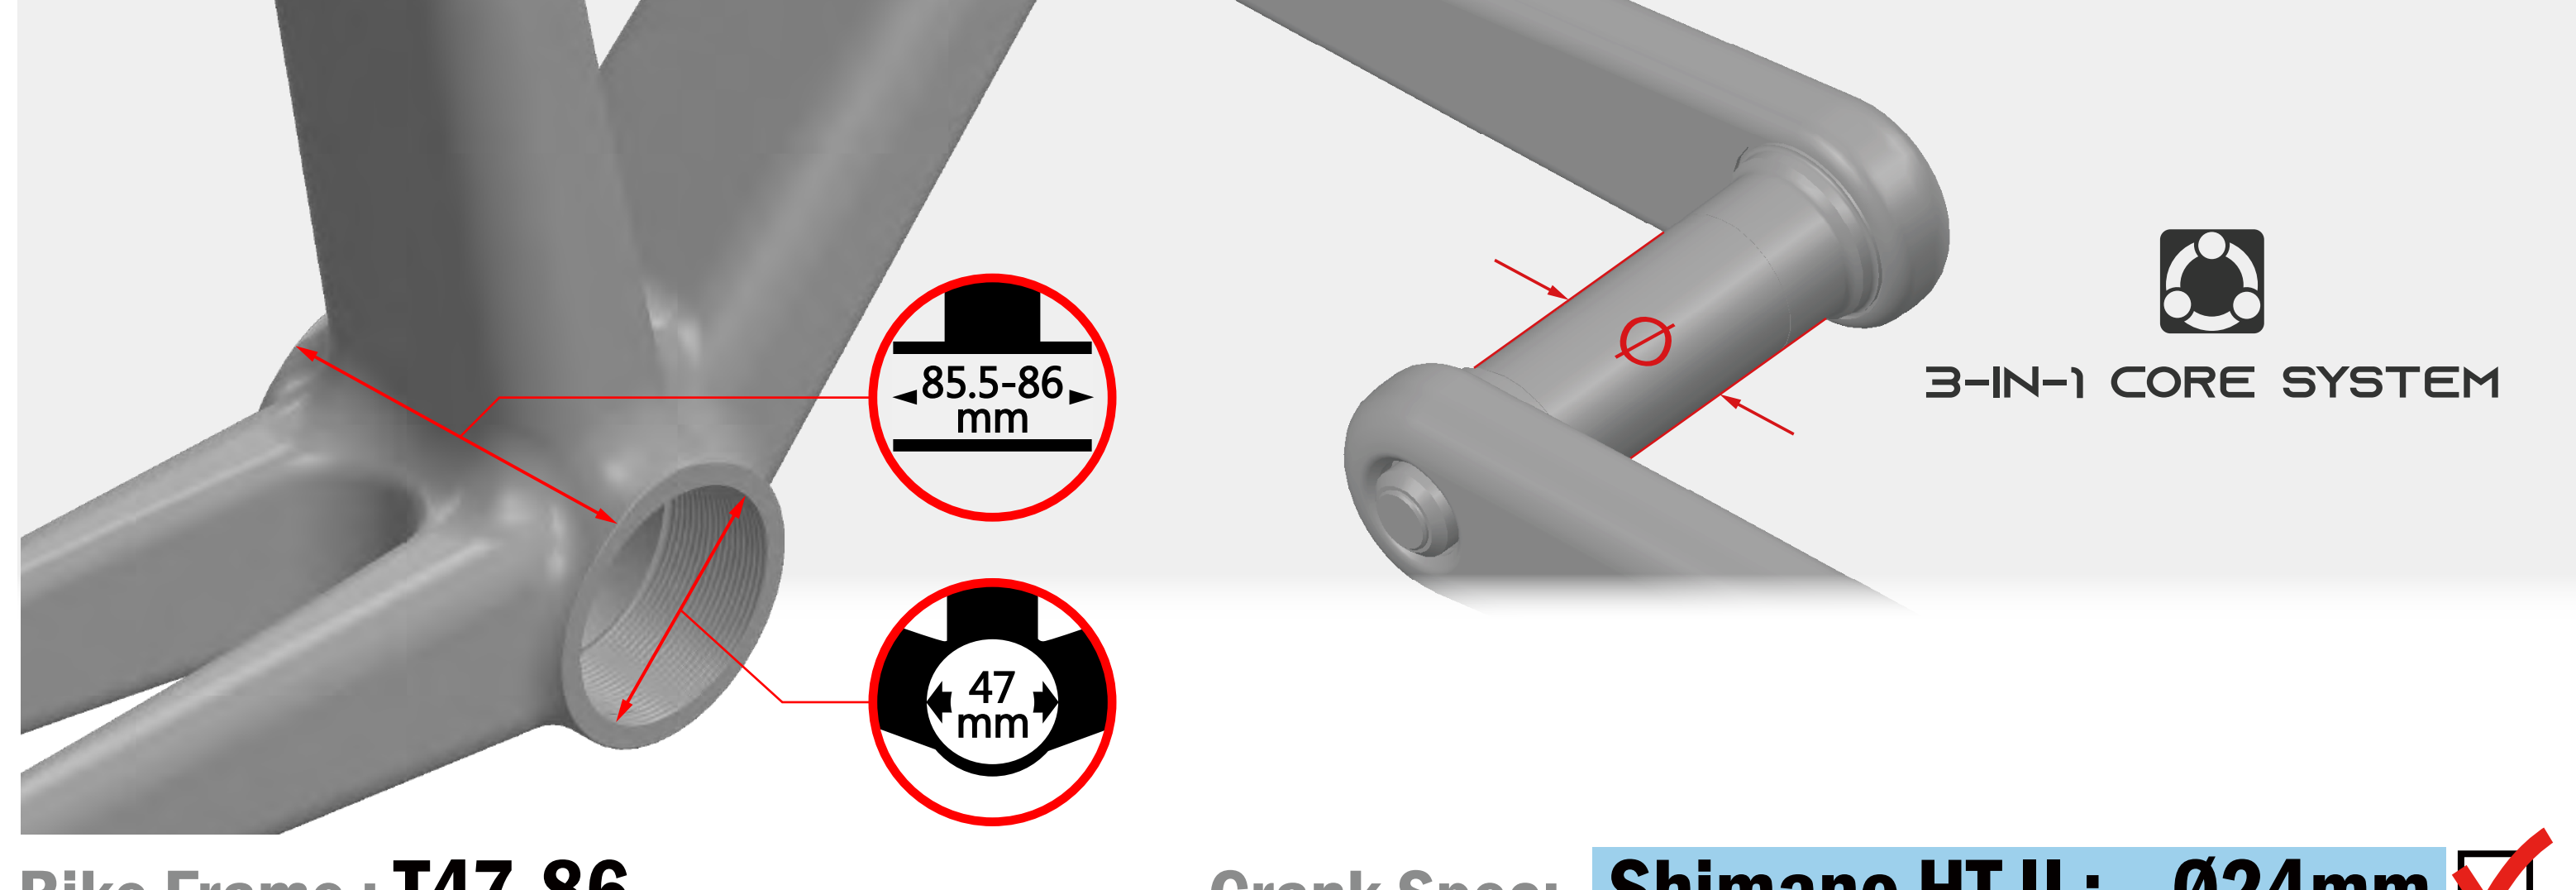

**Bike Frame : T47-86**

Thread Type  
Inner Diameter : 47mm  
Width : 85.5-86mm

**Crank Spec: Shimano HT II : Ø24mm**

**SRAM DUB : Ø28.99mm**

**ROTOR 3D+ : Ø30mm**

## BB T47-86 UNI-CORE Anatomy

- Before installation, please ensure that the purchased BB meets the following specifications and includes the following contents.



## General Safety

- To install TRIPEAK Bottom Bracket, we strongly recommend that you have a trained bicycle mechanic at your local bike shop.
- Do not alter this product in any way as it can cause unseen damage. Any modifications to this product will void the warranty.
- Make sure the crankset is firmly attached to the bottom bracket, Improperly attached cranks can become detached from the BB set.
- When cleaning the bottom bracket set, only use mild soap and water. Never use high-pressure water jet, It will cause BB cup internal water ingress and influencing the bearing rolling lifetime.
- If you have any questions or concerns about this product, Please feel free to contact us. E-mail: info@tripeakbearing.com



## Required Tools




## Bottom Bracket Installation



## Installation of Crank's Adapter

**3-IN-1 CORE SYSTEM**

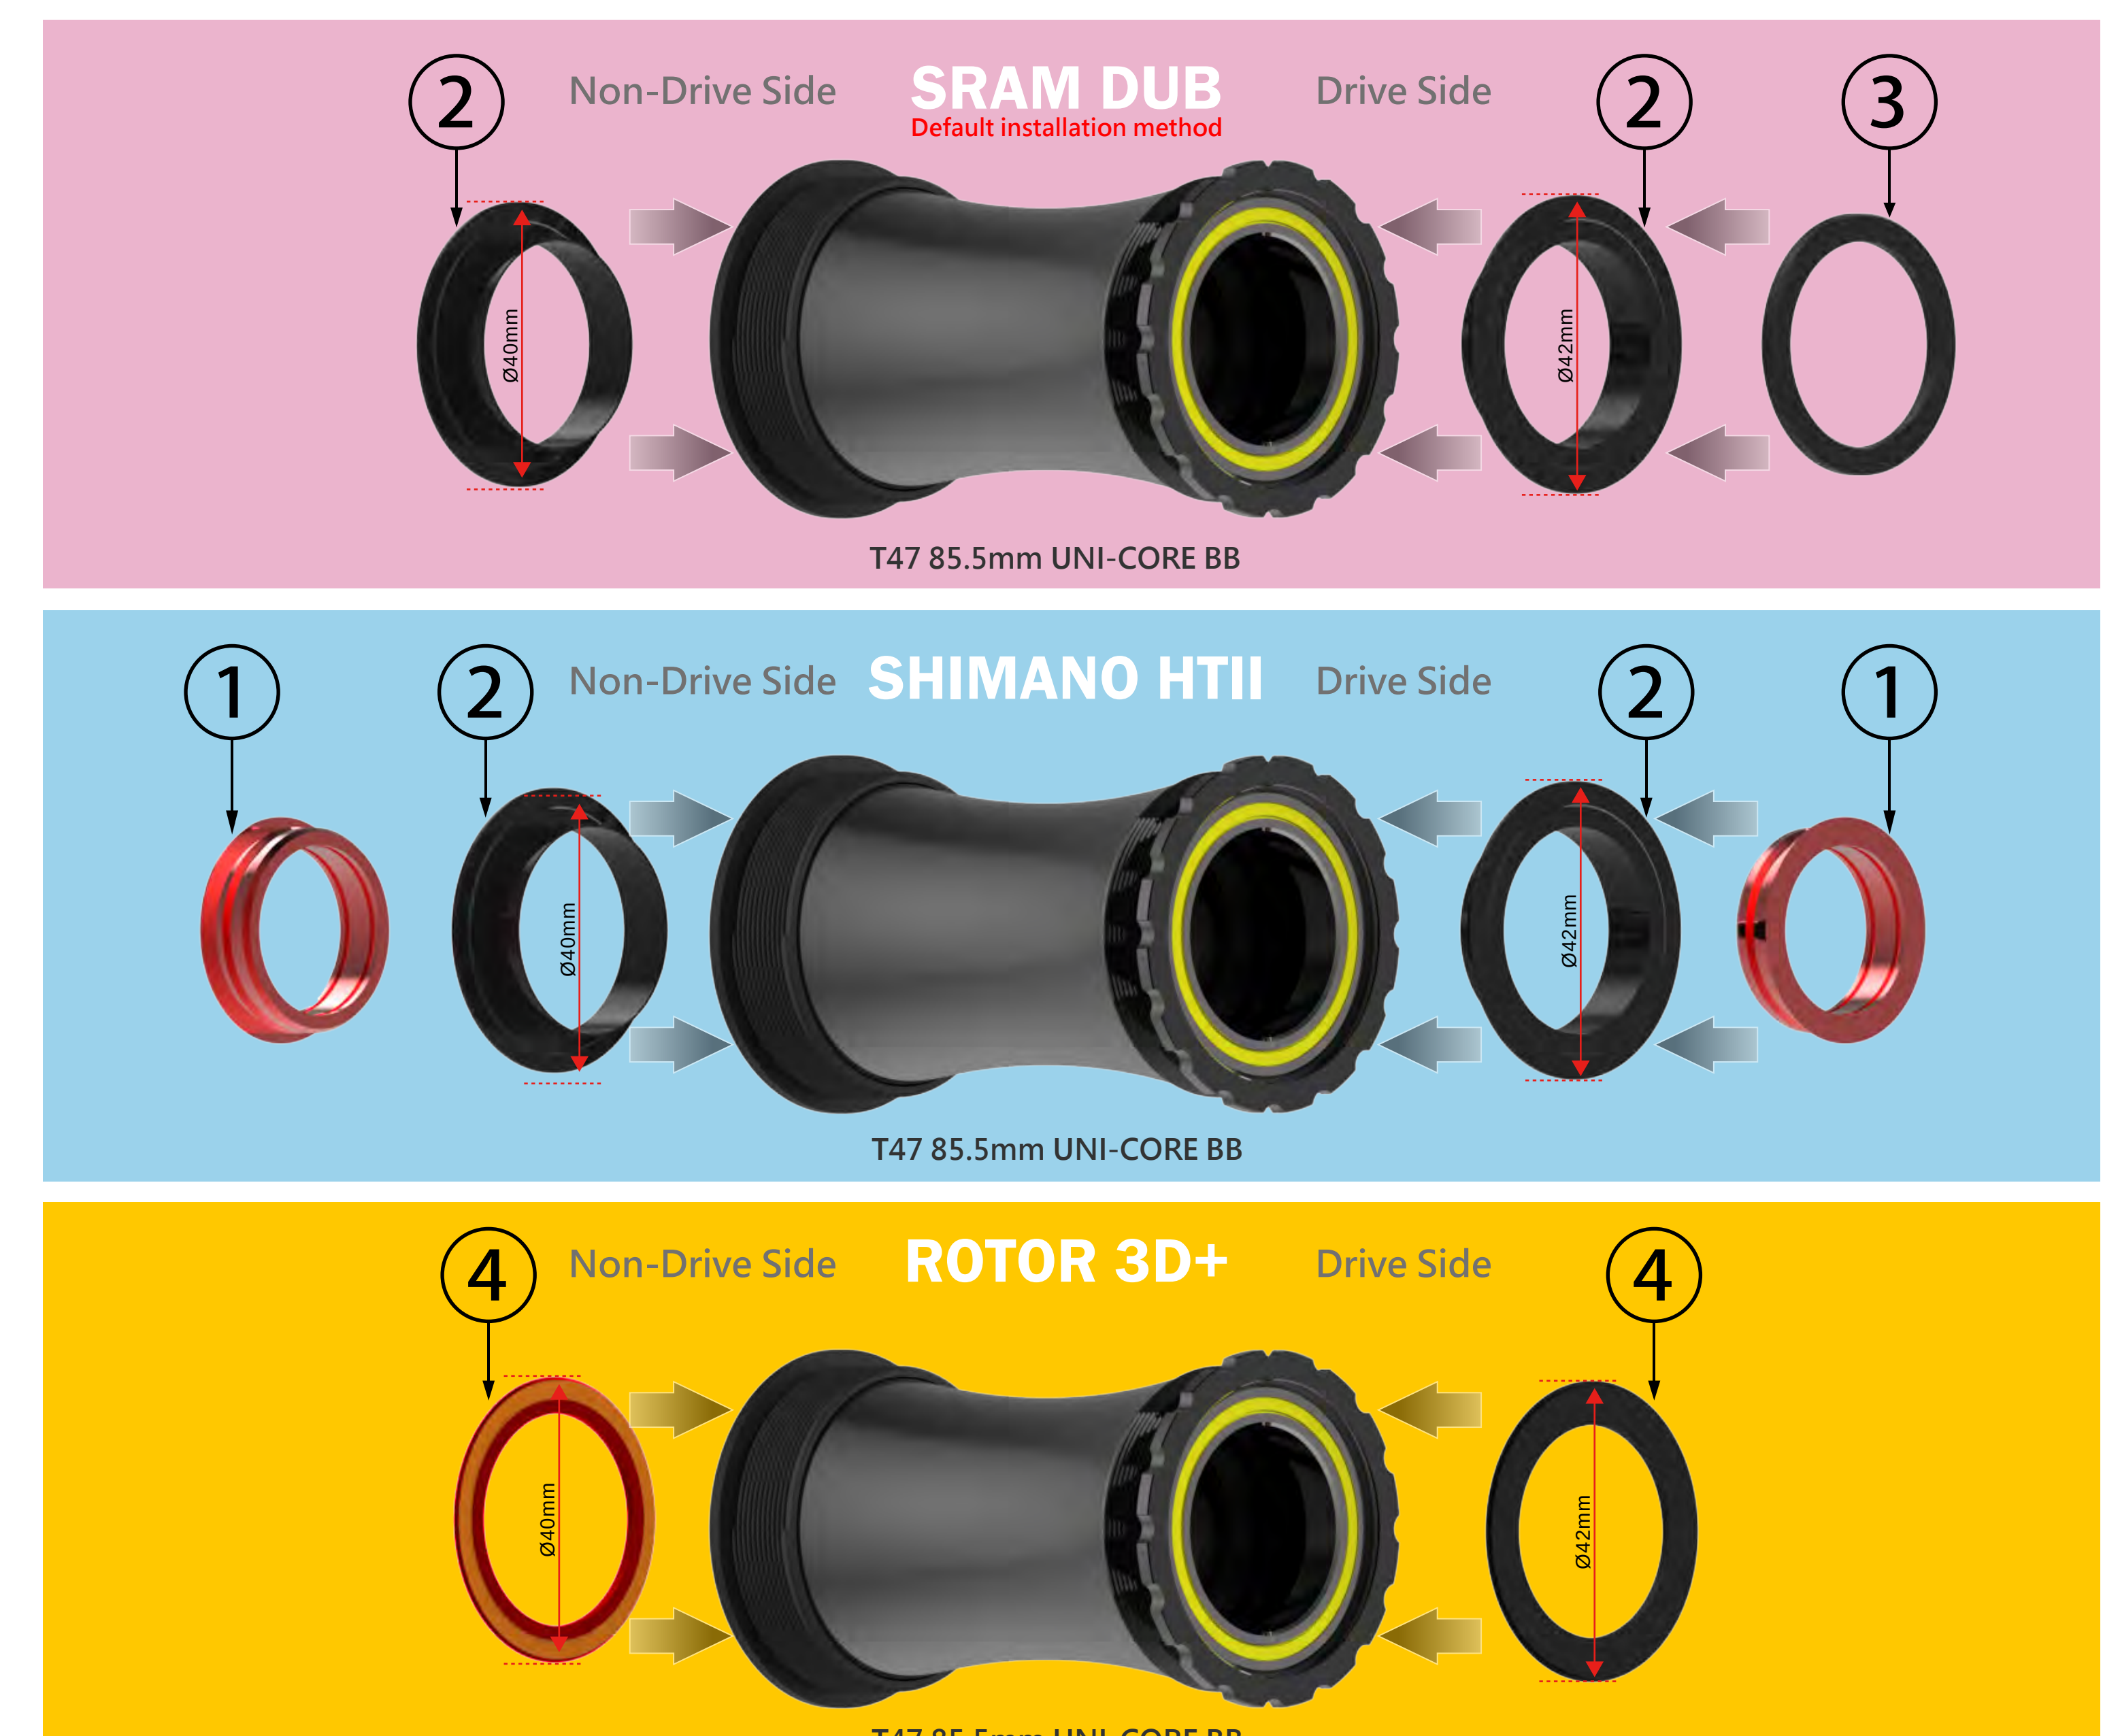

## Bottom Bracket Maintenance



**Lubricant Recommendation**  
**TRIPEAK ETERNA LV Fluid**

Product NO. EMA-GS52-003G      Product NO. EMA-GS52-010G

## Reapply lubricant to Bottom Bracket

