

2027

Product Catalog

**SPIN
STRIKE
NEVER SETTLE**





The lowercase "i" in TRiPEAK represents
innovation, integrity, and inspiration—

This core values that guide every product we design. Our mission is simple yet ambitious:
to empower cyclists with reliable, advanced components that elevate riding efficiency
and enhance the joy of cycling.

ELITE TEAM COOPERATION



Catalog



TECH _____ *P.03*

BEARINGS _____ *P.06*

HEADSET _____ *P.09*

BOTTOM BRACKET _____ *P.13*

PULLEY WHEEL _____ *P.25*

ACCESSORY / TOOL _____ *P.31*

DISTRIBUTION _____ *P.33*



01



G3 CERAMIC BALLS

G3-grade perfectly round ceramic balls create lower rotational resistance, allowing your power better to convert to speed.



02



G5 CERAMIC BALLS

The ceramic bearings utilize G5-grade ceramic balls and are paired with precisely machined steel race, delivering excellent rotational performance for riders.



03



NC RACE

NC Race Bearings with Nano Coating on inner and outer races. Dry-film coating reduces friction to 0.03 (dynamic) / 0.07 (static) and extends service life by over 300%.



04



ZERO CONTACT SEAL

ZERO Contact Seal – non-contact bearing seal design provides full coverage without added rotational resistance, optimizing efficiency and protection.



05



ETERNA LV FLUID

Eterna Low Viscosity lubricant ensures durable, reliable, and silent rotation for ceramic bearing.



06



DURA RACE

Jetstream Pro Dura Tech HS features a CNC-machined carbon fiber compounded race with ceramic balls for lightweight, corrosion-resistant, grease-free performance.



07



STAINLESS STEEL RACE

440C stainless steel inner and outer races provide excellent corrosion resistance, all-weather durability, and long-term smooth rotation, extending bearing lifespan.



08



CERASYNC HYBRID

CERASYNC combines ceramic balls for low friction and speed with stainless steel balls for corrosion resistance and structural stability.



09



NOIR RACE

The bearings feature a black oxide coating on the inner and outer races, enhancing the weather resistance of the bearings and extending their lifespan.



10



MAX BALLS

Max Series bearings feature a full complement of steel balls, engineered for high-strength applications such as suspension frame pivot points, delivering exceptional durability and impact resistance.




11



P05 STEEL BALLS

P05 precision steel bearings with 0.005 mm inner race eccentricity.

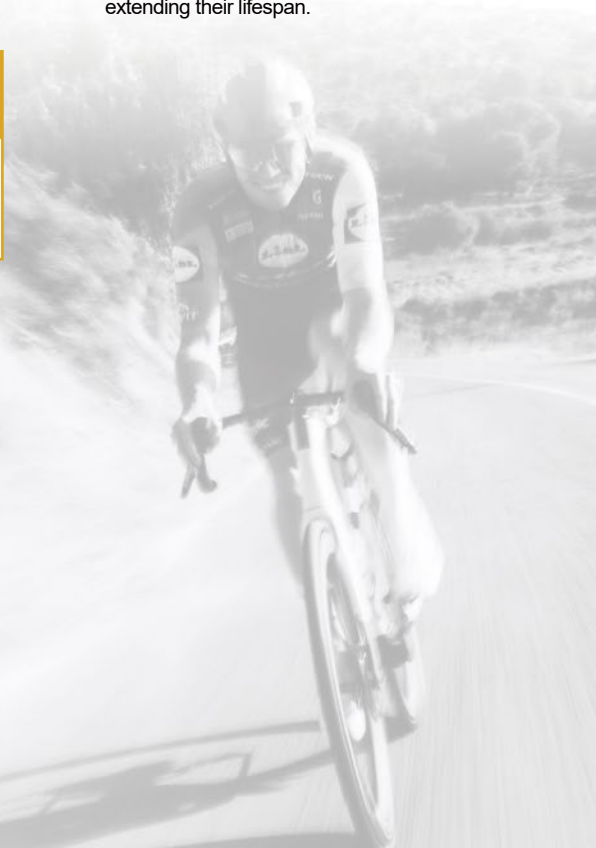



12

**AERO FLOW**

Redesigned lower pulley aero structure combines a sealed flat outer cap with a carbon-fiber inner cap to optimize airflow and reduce turbulence and pressure drag, delivering approximately 15–20% lower aerodynamic drag versus standard AOPW designs.



13

**ASYMMETRIC DESIGN**

TRIPEAK patented asymmetric pulley frame integrates an 18T tension pulley into the original derailleur cage, maximizing drivetrain efficiency.



14

**HOLLOW CAP**

Hollow pulley frame design allows larger bearings for superior rotation and stable support of the oversized pulley, while reducing external object interference for consistent, reliable performance.



15

**NARROW-WIDE TOOTH PROFILE**

The Narrow-wide Tooth Design allows the pulley to better engage with the chain, significantly improving operational stability.



16

**COMPOSITE CAGE PLATE**

Injection-molded pulley fully encapsulates the bearing, delivering quieter, more durable performance than traditional aluminum pulleys.



17

**SUPRA LV FLUID**

Supra LV: high-flow, low-viscosity lubricant for ceramic pulley bearings, ensuring fast and smooth operation.



18

**TWIST FIT**


Twist-Fit design accommodates Press-Fit BB frames for easier installation and removal, while dual-sided locking ensures precise spindle alignment and eliminates creaking noises.



19

**SUNG FIT**

Patented plastic-steel bushing design protects Press-Fit BB shells from wear, while the snug fit eliminates noise and corrects bottom bracket tolerances.

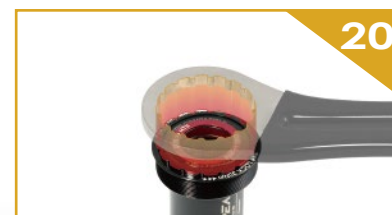

20

**16T BB TOOL**


Compatible with the universal BB tool with an O.D. 44mm, eliminating the need for various specialized tools.

BEARINGS



TEAM : LIDL TREK

BEARINGS

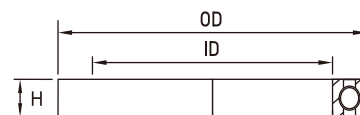

Unit : mm

I D: Inner Diameter OD: Outer Diameter

H : Height



NC CERAMIC

JETSTREAM PRO



- G3 Ceramic Balls
- NC RACE
- ETERNA LV Fluid
- ZERO Contact Seal
- 4-year warranty



G5 CERAMIC NOIR



- G5 Ceramic Balls
- Noir Coating for weather-resistant durability
- ETERNA LV Fluid
- ZERO Contact Seal



G5 CERAMIC



- G5 Ceramic Balls
- ETERNA LV Fluid



P05 STEEL



- P05 Steel Balls



MAX STEEL



- P05 Steel Balls
- MAX Balls Design



CERAMIC BALLS



- G5 Si3N3 Ceramic Ball
- Size: 3.969 / 4.763 / 6.350mm

NO.	ID	OD	H	NC CERAMIC	G5 CERAMIC NOIR	G5 CERAMIC	P05 STEEL	MAX STEEL
#606	6.0	15.0	5.0				✓	
#R4	6.3	15.8	4.9				✓	
#688	8.0	16.0	5.0				✓	✓
#688E	8.0	16.0	5.0/6.5					✓
#698	8.0	19.0	6.0					✓
#698E	8.0	19.0	6.0/7.5					✓
#398E	8.0	19.0	10.0/11.0					✓
#608	8.0	22.0	7.0			✓	✓	✓
#689	9.0	17.0	5.0			✓	✓	
#699	9.0	20.0	6.0			✓	✓	✓
#9227	9.0	22.0	7.0			✓	✓	
#609	9.0	24.0	7.0			✓	✓	
#R6	9.5	22.2	7.1				✓	
#6800	10.0	19.0	5.0			✓	✓	✓
#63800	10.0	19.0	7.0				✓	✓
#6900	10.0	22.0	6.0			✓	✓	✓
#7900	10.0	22.0	6.0					✓
#6900B9	10.0	22.0	6.0/9.0					✓
#F6900E	10.0	22.0/24.0	6.0/8.0					✓
#6000	10.0	26.0	8.0			✓	✓	✓
#16100	10.0	28.0	8.0				✓	
#6200	10.0	30.0	9.0				✓	
#6701	12.0	18.0	4.0				✓	
#6801	12.0	21.0	5.0			✓	✓	✓
#63801	12.0	21.0	7.0					✓
#3801H8	12.0	21.0	8.0					✓
#6901	12.0	24.0	6.0			✓	✓	✓
#7901	12.0	24.0	6.0					✓
#F6901E	12.0	24.0/26.5	6.0/7.0					✓
#6001	12.0	28.0	8.0			✓	✓	✓
#6201	12.0	32.0	10.0			✓	✓	
#6702	15.0	21.0	4.0			✓	✓	
#6802	15.0	24.0	5.0	✓	✓	✓	✓	✓
#3802	15.0	24.0	7.0					✓
#63802	15.0	24.0	7.0					✓
#F6802E	15.0	24.0/26.0	5.0/7.0					✓
#15267	15.0	26.0	7.0	✓	✓	✓	✓	✓
#15258	15.0	25.3	8.0				✓	
#15268	15.0	26.0	8.0			✓	✓	
#152610	15.0	26.0	10.0				✓	
#6902	15.0	28.0	7.0	✓	✓	✓	✓	✓
#7902	15.0	28.0	7.0					✓
#7902	15.0	28.0	7.0					✓

NO.	ID	OD	H	NC CERAMIC	G5 CERAMIC NOIR	G5 CERAMIC	P05 STEEL	MAX STEEL
#F6902E	15.0	28/30.5	7.0/9.5					✓
#6002	15.0	32.0	9.0			✓	✓	✓
#6202	15.0	35.0	11.0				✓	
#16287	16.0	28.0	7.0			✓	✓	
#163110	16.0	31.0	10.0				✓	
#6703	17.0	23.0	4.0				✓	
#6803	17.0	26.0	5.0	✓	✓	✓	✓	✓
#63803	17.0	26.0	7.0				✓	✓
#3803	17.0	26.0	10.0				✓	
#17287	17.0	28.0	7.0	✓	✓	✓	✓	✓
#6903	17.0	30.0	7.0	✓	✓	✓	✓	✓
#6903E	17.0	30.0	7.0/10.0					✓
#6003	17.0	35.0	10.0				✓	
#18287	18.0	28.0	7.0			✓	✓	
#18307	18.0	30.0	7.0	✓		✓	✓	
#19285	19.0	28.0	5.0				✓	
#B539E	19.05	30.16	6.35/7.14					✓
#6704	20.0	27.0	4.0				✓	
#20307	20.0	30.0	7.0				✓	
#6804	20.0	32.0	7.0			✓	✓	✓
#6904	20.0	37.0	9.0			✓	✓	✓
#6004	20.0	42.0	12.0				✓	
#215317	21.5	31.0	7.0					✓
#2153114	21.5	31.0	14.0					✓
#22378	22.0	37.0	8.0				✓	
#23327	23.0	32.0	7.0				✓	
#24377	24.0	37.0	7.0			✓	✓	
#6805N	25.0	37.0	6.0			✓	✓	
#6805	25.0	37.0	7.0			✓	✓	✓
#27537	27.5	37.0	7.0				✓	
#6706	30.0	37.0	4.0				✓	
#30396	30.0	39.0	6.5	✓		✓	✓	
#30407	30.0	40.0	7.0	✓	✓	✓	✓	
#6806	30.0	42.0	7.0	✓	✓	✓	✓	✓
#B543	39.7	50.8	7.14					✓
#6808	40.0	52.0	7.0					✓
#6809	45.0	58.0	7.0					✓
#6906	30.0	47.0	9.0				✓	
#6807	35.0	47.0	7.0			✓	✓	
#6807	40.0	52.0	7.0				✓	✓
#6809	45.0	58.0	7.0				✓	✓
#6710	50.0	62.0	6.0				✓	
#6810	50.0	65.0	7.0			✓	✓	

JETSTREAM PRO

DURA TECH HEADSET

FEAR NO SWEAT !
FEAR NO RAIN !
FEAR NO RUST !

Built to withstand sweat, dust, and the test of time.
With our durable and maintenance-free design,
enjoy worry-free rides for years to come!

Carbon Fiber Composite Outer Race

G3 Ceramic Ball

Stainless Steel Race



JETSTREAM PRO

CERASYNC-SS

PERFORMANCE STARTS WITH STABILITY




JETSTREAM PRO CERASYNC-SS ALL-WEATHER HIGH-PERFORMANCE HEADSET BEARING

True performance is built on control, consistency, and reliability—not just speed.

CERASYNC-SS delivers a stable steering foundation through a synchronized hybrid system of ceramic and stainless steel balls. Low friction meets structural strength, ensuring smooth, precise handling in all conditions.

Constructed with 440C stainless steel races, it resists moisture, corrosion, and wear—maintaining performance through rain, sweat, and repeated use. Stable.Consistent. Race-ready.

HEADSET BEARINGS

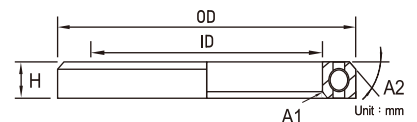

I D: Inner Diameter A1: Inner Diameter inclination
OD: Outer Diameter A2: A2: Outer Diameter inclination
H : Height



DURA TECH JETSTREAM PRO



COMING SOON

- G3 Ceramic Balls
- Corrosion-resistant Teflon composite outer ring
- Ultra-lightweight
- Self-lubricating design
- 4-year warranty



CERASYNOS JETSTREAM PRO



NEW

- Hybrid Ball Architecture
- Stainless Steel Race
- 4-year warranty



P05 NOIR



- P05 Steel Balls
- Noir Coating



P05 STEEL



- P05 Steel Balls



ID	OD	H	△1	△2	DURA TECH	CERASYNC SS	P05 NOIR	P05 STEEL
27.1	38.0	6.3	45° / 45°					✓
27.1	38.0	6.5	36° / 45°			✓		✓
30.0	42.0	7.0	90° / 90°					✓
30.0	42.0	7.0	36° / 45°					✓
30.0	39.0	6.5	45° / 45°					✓
30.1	41.0	6.3	45° / 45°					✓
30.1	41.0	6.5	36° / 45°			✓		✓
30.1	41.0	6.5	45° / 45°			✓		✓
30.1	41.0	7.0	45° / 45°				✓	✓
30.1	41.5	6.5	36° / 45°				✓	✓
30.1	41.8	6.3	45° / 45°					✓
30.1	41.8	6.5	45° / 45°			✓	✓	✓
30.1	41.8	7.0	36° / 45°					✓
30.1	41.8	7.0	45° / 45°					✓
30.1	41.8	8.0	36° / 45°					✓
30.15	41.0	7.7	36° / 45°					✓
30.5	41.8	7.7	45° / 45°					✓
30.5	41.8	8.0	45° / 45°			✓	✓	✓
30.5	41.8	8.0F	45° / 45°			✓	✓	✓
32.4	43.8	7.0	45° / 45°					✓
32.8	41.8	6.0	45° / 45°				✓	✓
33.0	43.8	7.0	30° / 45°					✓
33.0	44.0	6.0	36° / 45°				✓	✓
34.1	46.0	7.0	45° / 45°					✓
34.1	46.9	7.0	45° / 45°			✓	✓	✓
35.0	44.0	5.0	90° / 90°					✓
35.0	44.0	5.5	36° / 45°			✓	✓	✓
35.0	45.3	7.3	45° / 45°					✓
35.0	47.0	7.0	90° / 90°					✓
35.0	47.0	7.0	36° / 45°			✓		✓
35.0	47.0	8.0	45° / 45°					✓
36.8	45.8	6.5	45° / 45°					✓
37.0	46.9	7.0	45° / 45°			✓	✓	✓
37.0	48.0	7.0	45° / 90°					✓
37.0	48.9	6.5	36° / 45°				✓	✓
37.0	49.0	7.0	45° / 45°			✓	✓	✓
39.0	46.9	7.0	45° / 45°				✓	✓
40.0	49.0	6.0	45° / 45°				✓	✓
40.0	51.0	6.5	36° / 36°			✓	✓	✓
40.0	51.0	6.5	45° / 45°				✓	✓
40.0	51.0	7.0	45° / 45°					✓
40.0	51.5	7.0	45° / 45°					✓
40.0	51.8	7.5	36° / 45°				✓	✓
40.0	51.8	8.0	36° / 45°			✓	✓	✓
40.0	51.9	7.0	45° / 45°					✓
40.0	51.9	8.0	45° / 45°			✓	✓	✓
40.0	52.0	6.5	36° / 45°			✓	✓	✓
40.0	52.0	6.5	45° / 45°					✓
40.0	52.0	7.0	36° / 45°					✓
40.0	52.0	7.0	45° / 45°			✓	✓	✓
40.0	52.0	12	45° / 45°					✓
40.0	53.0	7.0	45° / 45°					✓ SS
40.5	49.5	6.5	45° / 45°			✓	✓	✓
42.0	51.8	7.0	45° / 45°			✓		✓
42.0	52.0	7.0	45° / 45°			✓	✓	✓
46.0	60.0	8.0	45° / 45°					✓
47.8	56.8	6.5	45° / 45°					✓
50.0	61.9	8.0	36° / 45°					✓

**COMING
SOON**

✓ : I.D. with small lip SS : Stainless steel

2026V3-0706 Latest product information is subject to TRIPEAK official announcements

BOTTOM BRACKET





UNI-CORE is a one-piece bottom bracket architecture that integrates both sides into a unified structure, eliminating axis misalignment and torsional distortion common in split BB systems under high loads. By maximizing structural rigidity and axis consistency, UNI-CORE enables smoother rotation, lower resistance, and more efficient transfer of pedaling power into forward momentum.

JETSTREAM PRO



Jetstream Pro NC Coated Ceramic Bearings BB introduces advanced NC Nano Coating for smoother performance and extended lifespan. With Twist-Fit installation and ZeroCreak technology, it ensures easy maintenance and eliminates noise. Enjoy a 4-year warranty for worry-free riding!



The ceramic bearings utilize G5-grade ceramic balls and are paired with precisely machined steel race, delivering excellent rotational performance for riders.



The P05 precision steel ball bearings, for reassuringly high smoothness and durability. 0.005 mm for eccentricity (out of roundness) of the track in the inner race. That's precise.



3-IN-1 CORE SYSTEM

The 3-in-1 Core System BB set can accommodate for three different crank spindle specifications. Easily switch between different cranks without the need to change the Bottom Bracket.



THREADED BB - BSA

BB SHELL DIA	BB SHELL WIDTH	SPINDLE DIA. COMPATIBILITY					
		24mm	28.99mm	30mm	22/24mm	25mm	25mm
		SHIMANO HTII	SRAM DUB	ROTOR 3D+	SRAM GXP	Campagnolo Ultra Torque	Campagnolo QCK-TECH
BSA 34.8mm (1.37)	68mm (ROAD)	1 • 2			N/A	7 No Bearing	8 No Bearing
	68/73mm (MTB)	3	N/A	N/A			
		4	5	N/A	6	N/A	N/A

BSA

JETSTREAM PRO

BSA 68MM : 3-IN-1

1

- NC CERAMIC BEARINGS
- 3-IN-1 Core System (HTII / DUB / 3D+)
- 4-year warranty

 Ceramic Bearing



BSA 68MM : 3-IN-1

2

- 3-IN-1 Core System (HTII / DUB / 3D+)

 Ceramic Bearing

Color Option



BSA 68MM HTII (ROAD)

3

- For Shimano HTII Crank Set

 Ceramic Bearing

 Steel Bearing

Color Option



BSA 68/73MM HTII (MTB)

4

- For Shimano HTII Crank Set

 Ceramic Bearing

 Steel Bearing

Color Option



BSA 68/73MM DUB

5

- For SRAM DUB Crank Set

 Steel Bearing



BSA 68/73MM GXP (ROAD/MTB)

6

- For SRAM GXP Crank Set

 Ceramic Bearing



BSA 68MM ULTRA TORQUE (ROAD)

7

- For Campagnolo Ultra Torque
- BB Set Without Bearing



BSA QCK-TECH

8

- For Campagnolo QCK-TECH
- BB Set Without Bearing



THREADED BB - ITA

BB SHELL DIA	BB SHELL WIDTH	SPINDLE DIA. COMPATIBILITY				
		24mm	28.99mm	30mm	25mm	25mm
		SHIMANO HTII	SRAM DUB	ROTOR 3D+	Campagnolo Ultra Torque	Campagnolo QCK-TECH
ITA 36 mm	70mm (ROAD)	1 • 2			5 No Bearing	6 No Bearing
		3	4	N/A		

ITA

JETSTREAM PRO

ITA 70MM : 3-IN-1

- NC CERAMIC BEARINGS
- 3-IN-1 Core System (HTII / DUB / 3D+)
- 4-year warranty

 Ceramic Bearing



1

ITA 70MM DUB

- For SRAM DUB Crank Set

 Steel Bearing



4

ITA 70MM : 3-IN-1

- 3-IN-1 Core System (HTII / DUB / 3D+)

 Ceramic Bearing



2

ITA 70MM ULTRA TORQUE (ROAD)

- For Campagnolo Ultra Torque
- BB Set Without Bearing



5

ITA 70MM HTII (ROAD)

- For Shimano HTII Crank Set

 Ceramic Bearing

 Steel Bearing

Color Option 



3

ITA QCK-TECH

- For Campagnolo QCK-TECH
- ZeroCreak
- BB Set Without Bearing



6



TEAM : XDS-ASTANA

THREADED BB - T47 68MM / T45

BB SHELL DIA 	BB SHELL WIDTH 	SPINDLE DIA. COMPATIBILITY				
		24mm SHIMANO HTII	28.99mm SRAM DUB	30mm ROTOR 3D+	25mm Campagnolo Ultra Torque	25mm Campagnolo QCK-TECH
T47 47mm	68 mm (ROAD)	1 • 2 • 3			6 No Bearing	7 No Bearing
T45 45mm	82.5 mm (ROAD) COLNAGO ONLY	4	5	N/A	N/A	N/A
		8				

T47 68

JETSTREAM PRO

T47 68MM : 3-IN-1



- NC CERAMIC BEARINGS
- 3-IN-1 Core System (HTII / DUB / 3D+)
- 4-year warranty
- Tool : $\Phi 52\text{mm}$ / 16 Notch



1

T47 68MM : 3-IN-1



- 3-IN-1 Core System (HTII / DUB / 3D+)
- Tool : $\Phi 52\text{mm}$ / 16 Notch



Color Option



2

T47 68MM : 3-IN-1

- 3-IN-1 Core System (HTII / DUB / 3D+)



3

T47 68MM SHIMANO

- For Shimano HTII Crank Set



4

T47 68MM DUB

- For SRAM DUB Crank Set



5

T47 68MM ULTRA TORQUE (ROAD)

- For Campagnolo Ultra Torque
- BB Set Without Bearing



6

CAMPAGNOLO QCK-TECH — COMING SOON —

7

T45

T45 82.5MM : 3-IN-1

- 3-IN-1 Core System (HTII / DUB / 3D+)



8

THREADED BB - T47 77.5MM

BB SHELL DIA	BB SHELL WIDTH	SPINDLE DIA. COMPATIBILITY				
		24mm	28.99mm	30mm	25mm	25mm
		SHIMANO HTII	SRAM DUB	ROTOR 3D+	Campagnolo Ultra Torque	Campagnolo QCK-TECH
T47 47mm	77.5 mm (ROAD) CERVELO/FACTOR	1 • 2 • 3			6 No Bearing	7 No Bearing
		4	5	N/A		

T47 77.5

JETSTREAM PRO

T47 77.5MM : 3-IN-1



- NC CERAMIC BEARINGS
- 3-IN-1 Core System (HTII / DUB / 3D+)
- 4-year warranty
- Tool : Φ52mm / 16 Notch



T47 77.5MM : 3-IN-1



- 3-IN-1 Core System (HTII / DUB / 3D+)
- Tool : Φ52mm / 16 Notch



Color Option



T47 77.5MM : 3-IN-1

- 3-IN-1 Core System (HTII / DUB / 3D+)



T47 77.5MM SHIMANO

- For Shimano HTII Crank Set




T47 77.5MM DUB

- For SRAM DUB Crank Set



T47 77.5MM ULTRA TORQUE (ROAD)

- For Campagnolo Ultra Torque
- BB Set Without Bearing



CAMPAGNOLO QCK-TECH

— COMING SOON —



THREADED BB - T47 85.5MM

BB SHELL DIA. 	BB SHELL WIDTH 	SPINDLE DIA. COMPATIBILITY				
		24mm SHIMANO HTII	28.99mm SRAM DUB	30mm ROTOR 3D+	25mm Campagnolo Ultra Torque	25mm Campagnolo QCK-TECH
T47 47mm	85.5 mm (ROAD) TREK/COLNAGO/SEKA	1 • 2 • 3			6 No Bearing	7 No Bearing
		4	5	N/A		

T47 85.5

JETSTREAM PRO

T47 85.5MM : 3-IN-1

1



- NC CERAMIC BEARINGS
- 3-IN-1 Core System (HTII / DUB / 3D+)
- 4-year warranty
- Tool : Φ52mm / 16 Notch

Ceramic Bearing



T47 85.5MM : 3-IN-1

2



- 3-IN-1 Core System (HTII / DUB / 3D+)
- Tool : Φ52mm / 16 Notch

Ceramic Bearing

Color Option



T47 85.5MM : 3-IN-1

3

- 3-IN-1 Core System (HTII / DUB / 3D+)

Ceramic Bearing

Color Option



T47 85.5MM HTII (ROAD)

4

- For Shimano HTII Crank Set

Ceramic Bearing

Steel Bearing



T47 85.5MM DUB

5

- For SRAM DUB Crank Set



Steel Bearing



T47 85.5MM ULTRA TORQUE (ROAD)

6

- For Campagnolo Ultra Torque
- BB Set Without Bearing



CAMPAGNOLO QCK-TECH

— COMING SOON —

7

NON-THREADED BB - BB86 / 92

BB SHELL DIA	BB SHELL WIDTH	SPINDLE DIA. COMPATIBILITY				
		24mm	28.99mm	30mm	25mm	25mm
		SHIMANO HTII	SRAM DUB	ROTOR 3D+	Campagnolo Ultra Torque	Campagnolo QCK-TECH
BB86/92 41mm	86mm (ROAD/MTB)	1 • 3	2 • 4		5 No Bearing	6 No Bearing
	86/92mm (ROAD/MTB)	8	9	N/A		

BB86 (TWIST FIT)

JETSTREAM PRO

BB86 HTII

- NC CERAMIC BEARINGS
- ZeroCreak
- Patented Twist-Fit Design
- 4-year warranty

 Ceramic Bearing



1

BB86 QCK-TECH

- For Campagnolo QCK-TECH
- ZeroCreak
- Patented Twist-Fit Design
- BB Set Without Bearing



6

JETSTREAM PRO

BB86 DUB/3D+

- 2-IN-1 Core System (DUB / 3D+)
- NC CERAMIC BEARINGS
- ZeroCreak
- Patented Twist-Fit Design
- 4-year warranty

 Ceramic Bearing



2

BB86 86/92 HTII

- For Shimano HTII Crank Set
- ZeroCreak
- Patented Twist-Fit Design

 Ceramic Bearing  Steel Bearing

Color Option



3

BB86 86/92 DUB/3D+

- 2-IN-1 Core System (DUB / 3D+)
- ZeroCreak
- Patented Twist-Fit Design

 Ceramic Bearing  Steel Bearing



4

BB86 86 ULTRA TORQUE (ROAD)

- For Campagnolo Ultra Torque
- ZeroCreak
- Patented Twist-Fit Design
- BB Set Without Bearing



5

BB86 (PRESS FIT)

BB86 86MM : 3-IN-1

- 3-IN-1 Core System (HTII / DUB / 3D+)
- PRESS-FIT Design (Plastic Cup)

 Ceramic Bearing



7

BB86 86/92MM (ROAD/MTB)

- PRESS-FIT Design (Plastic Cup)
- For Shimano HTII Crank Set

 Ceramic Bearing

 Steel Bearing



8

BB86 86/92 DUB

- PRESS-FIT Design (Plastic Cup)
- For SRAM DUB Crank Set

 Steel Bearing



9

NON-THREADED BB - BB30 / PF30

BB SHELL DIA	BB SHELL WIDTH	SPINDLE DIA. COMPATIBILITY				
		24mm	28.99mm	30mm	25mm	24mm
		SHIMANO HTII	SRAM DUB	ROTOR 3D+	Campagnolo Ultra Torque	SHIMANO HTII
BB30 42mm	68mm (ROAD)	1 • 2			3 No Bearing	4
PF30 46mm	68mm (ROAD)					

BB30

PF30

JETSTREAM PRO

BB30/PF30 68MM : 3-IN-1 1

- NC CERAMIC BEARINGS
- 3-IN-1 Core System (HTII / DUB / 3D+)
- ZeroCreak
- Patented Twist-Fit Design
- 4-year warranty



Ceramic Bearing



BB30/PF30 68MM : 3-IN-1 2

- 3-IN-1 Core System (HTII / DUB / 3D+)
- ZeroCreak
- Patented Twist-Fit Design



Ceramic Bearing



Steel Bearing



4-IN-1 68/73MM CAMPY 3

- BB30 / BB30A / PF30 / PF30A 4-in-1 BB Set
- For Campagnolo Ultra Torque
- ZeroCreak
- Patented Twist-Fit Design
- BB Set Without Bearing



4-IN-1 68/73MM HTII 4

- BB30 / BB30A / PF30 / PF30A 4-in-1 BB Set
- For Shimano HTII
- ZeroCreak
- Patented Twist-Fit Design



Ceramic Bearing



TEAM : LIDL TREK
Photo credit @Ross_Bell

NON-THREADED BB - BB30A / PF30A

BB SHELL DIA 	BB SHELL WIDTH 	SPINDLE DIA. COMPATIBILITY				
		24mm SHIMANO HTII	28.99mm SRAM DUB	30mm ROTOR 3D+	25mm Campagnolo Ultra Torque	24mm SHIMANO HTII
BB30A 42mm	73mm (ROAD)	N/A	1		2 No Bearing	4
PF30A 46mm	73mm (ROAD)	N/A	3			

BB30A

BB30A 73MM : 2-IN-1

1

- 2-IN-1 Core System (DUB / 3D+)
- ZeroCreak
- Patented Twist-Fit Design

 **Ceramic Bearing**
 **Steel Bearing**



PF30A

PF30A 73MM : 3-IN-1

3

- 3-IN-1 Core System (HTII / DUB / 3D+)
- ZeroCreak
- Patented Twist-Fit Design

 **Ceramic Bearing**
 **Steel Bearing**



4-IN-1 68/73MM CAMPY

2

- BB30 / BB30A / PF30 / PF30A 4-in-1 BB Set
- For Campagnolo Ultra Torque
- ZeroCreak
- Patented Twist-Fit Design
- BB Set Without Bearing



4-IN-1 68/73MM HTII

4

- BB30 / BB30A / PF30 / PF30A 4-in-1 BB Set
- For Shimano HTII
- ZeroCreak
- Patented Twist-Fit Design

 **Ceramic Bearing**



TEAM : XDS-ASTANA

NON-THREADED BB - BBRIGHT / BB65

BB SHELL DIA 	BB SHELL WIDTH 	SPINDLE DIA. COMPATIBILITY				
		24mm SHIMANO HT II	28.99mm SRAM DUB	30mm ROTOR 3D+	25mm Campagnolo Ultra Torque	30/25mm Campagnolo QCK-TECH
BBRIGHT 46mm	79mm (ROAD)	1 • 2 • 3			4 No Bearing	5 No Bearing
BB65 65mm	63mm (ROAD) LOOK ONLY					
		6				

BBRIGHT

JETSTREAM PRO

BBRIGHT 79MM : 3-IN-1

1



- NC CERAMIC BEARINGS
- 3-IN-1 Core System (HTII / DUB / 3D+)
- 4-year warranty
- Tool : Φ52mm / 16 Notch

Ceramic Bearing



BBRIGHT 79MM : 3-IN-1

2



- 3-IN-1 Core System (HTII / DUB / 3D+)
- Tool : Φ52mm / 16 Notch

Ceramic Bearing



BBRIGHT 79MM : 3-IN-1

3

- 3-IN-1 Core System (HTII / DUB / 3D+)
- ZeroCreak
- Patented Twist-Fit Design

Ceramic Bearing

Steel Bearing



BBRIGHT 79MM ULTRA TORQUE (ROAD)

4

- For Campagnolo Ultra Torque
- ZeroCreak
- Patented Twist-Fit Design
- BB Set Without Bearing



BBRIGHT 79MM QCK-TECH

5

- For Campagnolo QCK-TECH
- ZeroCreak
- Patented Twist-Fit Design
- BB Set Without Bearing



BB65

BB65 63MM : 3-IN-1

6

- 3-IN-1 Core System (HTII / DUB / 3D+)
- ZeroCreak
- Patented Twist-Fit Design

Ceramic Bearing

Steel Bearing



TEAM : Equipo Kern Pharma



NON-THREADED BB - BB386

BB SHELL DIA	BB SHELL WIDTH	SPINDLE DIA. COMPATIBILITY				
		24mm	28.99mm	30mm	25mm	25mm
		SHIMANO HTII	SRAM DUB	ROTOR 3D+	Campagnolo Ultra Torque	Campagnolo QCK-TECH
BB386 46mm	86 mm (ROAD/MTB)	TWIST FIT				
		1 • 2 • 3			4 No Bearing	5 No Bearing
		PRESS FIT				
		7	6	8	N/A	N/A

BB386 (TWIST FIT)

JETSTREAM PRO

BB386 86.5MM : 3-IN-1

1



- NC CERAMIC BEARINGS
- 3-IN-1 Core System (HTII / DUB / 3D+)
- 4-year warranty
- Tool : Φ52mm / 16 Notch

Ceramic Bearing



BB386 86.5MM : 3-IN-1

2



- 3-IN-1 Core System (HTII / DUB / 3D+)
- Tool : Φ52mm / 16 Notch

Ceramic Bearing



BB386 86.5MM : 3-IN-1

3

- 3-IN-1 Core System (HTII / DUB / 3D+)
- ZeroCreak
- Patented Twist-Fit Design

Ceramic Bearing

Steel Bearing



BB386 86.5MM ULTRA TORQUE⁴

- For Campagnolo Ultra Torque
- ZeroCreak
- Patented Twist-Fit Design
- BB Set Without Bearing

(ROAD)



BB386 86.5MM QCK-TECH

5

- For Campagnolo QCK-TECH
- ZeroCreak
- Patented Twist-Fit Design
- BB Set Without Bearing



BB386 (PRESS FIT)

BB386 86.5MM : 3-IN-1

6

- 3-IN-1 Core System (HTII / DUB / 3D+)
- PRESS-FIT Design (Plastic Cup)

Ceramic Bearing



BB386 86.5MM SHIMANO

7

- For Shimano HTII Crank Set
- PRESS-FIT Design (Plastic Cup)

Steel Bearing



BB386 86.5MM DUB

8

- For SRAM DUB Crank Set
- PRESS-FIT Design (Plastic Cup)

Steel Bearing



PULLEY WHEEL





AERO DYNAMIC PERFORMANCE

↑ **10-15**

AOPW-AERO 0.0089N

AOPW 0.0103N

Simulated speed : 30km/hr
Minimum Value : ACPW AERO—0.008956879 / AOPW—0.010386514

JETSTREAM PRO

AOPW AERO ROAD SET

- 12/16 T • 4-year warranty
- **Compatible with**
Shimano Dura-Ace R92XX
Ultegra R81XX

AOPW AERO ROAD SET

- 12/18 T • 4-year warranty
- **Compatible with**
Shimano Dura-Ace R92XX
Ultegra R81XX
SRAM Red E1 / Force E1 type



JETSTREAM PRO

AOPW *EVO***TRANSPARENT AERO PULLEY**

The oversized 18T lower pulley features a newly developed transparent aero cap, derived from the aerodynamic design of the AOPW-AERO system.

This updated structure improves airflow efficiency while showcasing the internal mechanism with a distinctive technical aesthetic.

OPTIMIZED CHAIN PATH STABILITY

Refined pulley alignment improves chain path dynamics across the drivetrain, promoting smoother operation and enhanced stability under load.

UNIFIED 12-SPEED COMPATIBILITY

A single modular system supports four major

12-speed road platforms:

Shimano R9200/R8100,

SRAM Red E1/Force E1,

One system. Multiple platforms.



JETSTREAM PRO

AOPW EVO ROAD SET

- 12/16 T • 4-year warranty
- **Compatible with**
Shimano Dura-Ace R92XX
Ultegra R81XX

AOPW EVO ROAD SET

- 12/18 T • 4-year warranty
- **Compatible with**
Shimano Dura-Ace R92XX
Ultegra R81XX
SRAM Red E1 / Force E1 type



JETSTREAM PRO

• 4-year warranty

SHIMANO



DURA ACE-11S

- 12/18 T
- Compatible with Shimano 11speed DURA-ACE R91XX

Color Option



ULTEGRA/105-11S

- 12/18 T
- Compatible with Shimano 11speed Ultegra / 105 R80XX / R70XX GS type

Color Option



ULTEGRA/105-11S

- 11/18 T
- Compatible with Shimano 11speed Ultegra 68XX / 58XX GS type

Color Option



XT/GRX-12S

- 13/18 T
- Compatible with Shimano XT M81XX SGS type GRX RX822 SGS type

Color Option



GRX-2x11/2x12S

- 11/18 T
- Compatible with Shimano 2x12speed GRX RX810 / RX815 Di2 2x11speed GRX RX820 / RX825 Di2

Color Option



GRX-1x11S

- 11/18 T
- Compatible with Shimano 1x11speed GRX RX812

Color Option

SRAM



ROAD AXS D1-12S

- 12/18 T
- Compatible with SRAM ROAD AXS 12speed FORCE D1 / D2, RIVAL D1 / E1

Color Option



XPLR AXS E1-13S

- 14/18 T
- Compatible with SRAM AXS XPLR 13speed RED XPLR E1 / FORCE XPLR E1 / RIVAL XPLR E1

Color Option



XPLR AXS D1-12S

- 12/18 T
- Compatible with SRAM AXS XPLR 12speed RED XPLR D1 / FORCE XPLR D1 / RIVAL XPLR D1

Color Option



EAGLE T-TYPE-12S

- 14/18 T
- Compatible with SRAM Eagle AXS T-Type XX1SL / XX / X0 / GX Eagle T-Type 90 / 70

Color Option



EAGLE-12S

- 12/18 T
- Compatible with SRAM Eagle 12speed XX1 / X01 / GX Eagle AXS 12speed XX1 / X01 / GX

Color Option



E-TAP-11S

- 11/18 T
- Compatible with SRAM E-TAP 11speed Red A1

Color Option



UPPER 11 / LOWER 11T



11/11T-12S (ROAD)

- **Compatible with Shimano**
DURA ACE 92xx
Ultegra 81xx/105 71xx 12 Speed (Road)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option

UPPER 11 / LOWER 11T



11/11T-10/11S (ROAD)

- **Compatible with Shimano**
10/11 Speed (Road)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option

UPPER 11 / LOWER 13T



11/13T (MTB/GRAVEL)

- **Compatible with Shimano**
GRX/XT 11 Speed ; GRX 810,815/XT 8100
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option

UPPER 12 / LOWER 14T



12/14T-12S (ROAD)

- **Compatible with Shimano**
DURA ACE 92xx
Ultegra 81xx/105 71xx 12 Speed (Road)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option

UPPER 12 / LOWER 14T



12/14T-11S (ROAD)

- **Compatible with Shimano**
DURA ACE 91xx
Ultegra 80xx/105 70xx 11 Speed (Road)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option

UPPER 13 / LOWER 13T



13/13T (MTB/GRAVEL)

- **Compatible with Shimano**
GRX/XT 11 Speed ; GRX 812,817/XT M9100
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option

SRAM



UPPER 12 / LOWER 12T



12/12T-12S (ROAD)

- **Compatible with SRAM**
E-Tap AXS ROAD 12 Speed (Road)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option



UPPER 12 / LOWER 14T



12/14T-12S (ROAD)

- **Compatible with SRAM**
E-Tap AXS ROAD 12 Speed (Road)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option



UPPER 11 / LOWER 11T



11/11T-10/11S (ROAD)

- **Compatible with SRAM**
11 Speed (Road)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option

UPPER 14 / LOWER 16T




14/16T (EAGLE/XPLR T-TYPE)

- **Compatible with SRAM**
T-TYPE 12/13 Speed (Road)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option



UPPER 12 / LOWER 14T



12/14T-EAGLE12S (MTB)

- **Compatible with SRAM**
Eagle/Eagle AXS 12 Speed (Non T-TYPE)
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option



UPPER 12 / LOWER 12T



12/12T-11S (MTB)

- **Compatible with SRAM**
X0/X1/X01/GX 11 Speed
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option



CAMPAGNOLO



UPPER 10 / LOWER 10T




10/10T-10/11S (ROAD)

- **Compatible with Campagnolo**
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option

UPPER 11 / LOWER 11T



11/11T-10/11S (ROAD)

- **Compatible with Campagnolo**
- **Bearing Type**
 - Ceramic Bearing
 - Steel Bearing

Color Option



TOOLS/ ACCESSORY



DUB PRELOAD RING

- Compatible with SRAM DUB
- Material—AL 6061
- Available in 10 colors

Color Option



ULTRA-LIGHT ROTOR LOCKRING

- Center Lock design / Ultra-light at 7 g
- Material—AL 6061
- Available in 10 colors

Color Option



TOOLKITS



TWIST-FIT BB / BEARING REPLACEMENT TOOL KITS

- Twist-Fit BB Replacement Tool Kits
- Bearing Set Replacement Tool Kits



HUB BEARING EXTRACTION TOOL KITS

- Bearing ID :
8/9/10/12/15/17/20/25mm compatible



HUB BEARING INSTALLATION TOOL KITS

- Bearing ID :
8/9/10/12/15/17/20/25mm compatible

BB WRENCH & LV FLUID

BB CUP WRENCH

EMA-TT-B015K



- OD:44mm-16Notch/50mm-12Notch
- With fixing hardware fits 24 / 29 / 30 mm

DUB ADAPTER

EMA-TT-B015-DUB



- Fit with TT-B015K
- T47-DUB:52mm-16Notch
- BSA-DUB:46mm-24Notch

BB CUP WRENCH

EMA-TT-B003



- (IB24/IB30 Series)
- For IB24/IB30 Series

ETERNA LV FLUID 3ml

EMA-GS52-003G



- Ceramic Bearing Lubricant

ETERNA LV FLUID 10ml

EMA-GS52-010G



- Ceramic Bearing Lubricant

SUPRA LV FLUID 5ml

EMA-JW-0LPK30



- (30 Bottles/Box)
- Ceramic Bearing Lubricant



DISTRIBUTION

NORTH AMERICA

MEXICO

ApolloBikes.Shop

Bosque de Toronjos 21, 502, Bosques de Las Lomas, Cuajimalpa de Morelos, Ciudad de México, 05100, México

+52 55 68096909
cpaez@apollobikes.shop
<https://apollobikes.shop/>



PUERTO RICO

HM Cycle Shop

Carretera #1 Km 89.9 Sector Las Marias Salinas
Puerto Rico 00751-2551

1-787-685-2121
hmcycleshop@gmail.com
www.facebook.com/HMCYCLE



SOUTH AMERICA

BRAZIL SESSION

Rua Vereador Germano Luiz Vieira, 6457 Galpão 02, Sala
05 Arraial das Cunhas - Itajaí - SC - Brasil

+55 11 2619-7074
www.sessionbrasil.com.br/



EUROPE

UNITED KINGDOM

JM Cycles LTD

Ground Floor Office 2 Carnegie Court, The Broadway,
Farnham Common, Slough, United Kingdom, SL2 3GQ

+44 01206918592
jmcyclesltd@gmail.com
www.eminencecycleco.com



BELGIUM

LX Service

Kromstraat 18 2470 Retie

+3214375029
info@lxservice.be
<https://www.lxservice.be/>



SWITZERLAND

Rennshop Wüthrich AG

Lyssachstrasse 110, 3400 Burgdorf, Switzerland

034 422 99 44
martin.wuethrich@rennshop.ch
www.rennshop.ch/



SPAIN

VERSION BIKE SL

Alcay, 6, 03203 Elche (Alicante), Spain

34 865 550 887
versionbike.com/



FRANCE

P2R PROCONCEPT 2 ROUES

27 rue Jan Palach - 44220 COUÉRON

02 51 81 81 00
contact@p2r-net.com
www.p2r-expert.com



DENMARK

Momentum Sport ApS

Gottlandsvej 13D - 8700 Horsens

+45 50 69 35 42
info@momentumsport.dk
<https://www.momentumsport.dk/>



ITALY

FLOWONE SRL

Via San Paolo, 115/E, 59100 Prato (PO)

39 344 748 6326
flowonesrl@gmail.com
<https://flowonesrl.com/>



SWEDEN

Momentum Sport ApS

Gottlandsvej 13D - 8700 Horsens

+45 50 69 35 42
info@momentumsport.dk
<https://www.momentumsport.dk/>



NORWAY

Momentum Sport ApS

Gottlandsvej 13D - 8700 Horsens

+45 50 69 35 42
info@momentumsport.dk
<https://www.momentumsport.dk/>



FINLAND

Momentum Sport ApS

Gottlandsvej 13D - 8700 Horsens

+45 50 69 35 42
info@momentumsport.dk
<https://www.momentumsport.dk/>



BECOME AN AUTHORIZED TRIPEAK PARTNER

We are looking for professional distribution partners to represent TRIPEAK in selected markets worldwide.

For partnership inquiries, please contact us:

info@tripeakbearing.com



AUSTRALIA & SOUTH PACIFIC

AUSTRALIA
DSG Pro Imports PTY LTD
18/3 Apollo St Warriewood 2102 NSW

+61 (0) 2 9979 2855
info@dawsonsports.com.au
www.dawsonsports.com.au



ASIA

THAILAND
Asia International Business
Sales Co., Ltd.

1132/22 Moo 17, Kanchanapisek Rd., Talingchan, Bangkok 10170, Thailand
+66 2 8877813-4
seema1@ksc.th.com
www.asiabike.com/home/



PHILIPPINES
CHAMP BIKE
34 Wilson, San Juan, 1502 Kalakhang Maynila, Philippines

+639053705648
champ@chambikeph.com
www.instagram.com/chambikeph



INDONESIA
Dewata Cycling International
Jl. Pluit Karang Cantik No. 46, Penjaringan, Jakarta Utara 14450 Indonesia

+6285183088353
dewatacyclingint@gmail.com
Instagram.com/dewatacyclingint/



REPUBLIC OF KOREA
Fifty2nd
12377-15, Gyeongchun-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

+82-10-4605-6482
info@akro.cc
fifty2nd.co.kr



VIETNAM
HP CYCLES VN
HCMC, Binh Chanh District, Binh Hung Ward, No 11 Street, No 64

+84901080604
hpcyclesvn@gmail.com
hpcycles.vn/



INDIA
WE SNAP INDIA
Office No 402, Aseem Commercial complex, Koregaon Park, Pune, 411036

+91 9112299660
info@wesnapindia.in
https://wesnapindia.in/



JAPAN
VALSIS
590-0906 No.287-3, 5-CHO, SANBOCHO, SAKAIKU, SAKAISHI, OSAKA, JAPAN

(81)-72-229-8251
info@valsis-inc.com
valsis-inc.com/



UAE
INGRUPPETTO
4th St, Warehouse 4, Al Quoz 3, Dubai, UAE

+971 (0) 44 919 867
info@ingruppetto.com
ingruppetto.com/



CHINA
SCOM wheels
No.1633, Jicheng Road, Tong'an District, Xiamen, Fujian Province, China

0592-7010251
marketing@scomwheels.com
www.scomsports.com



MALAYSIA
FREEWHEEL CYCLE TRADING
No.24, Jalan TS8 3, Taman Industri Sg. Buloh, 47000 Petaling Jaya, Selangor Darul Ehsan, Malaysia

+603-6157 9660
freewheelcycle@gmail.com



SINGAPORE
BikeMartSG
140 Sims Avenue, Singapore 387462

+65 8806 1843
business@bikemartsg.com
BIKEMARTSG.COM





Specializing in premium ceramic bearings and state-of-the-art drivetrain applications, TRiPEAK delivers solutions tailored to performance-driven riders. Designed for those who demand efficiency, durability, and simplicity, our products redefine the cycling experience, helping riders unlock their true potential on every journey.

☎ 886-4-2463-6319
✉ info@tripeakbearing.com
f Tripeak Taiwan
@tripeakcycling
🌐 tripeakbearing.com

